beyma

PROFESSIONAL LOUDSPEAKERS
www.beyma.com

10CX300Fe

COAXIAL TRANSDUCER

KEY FEATURES

- High power handling: 600 W / 100 W program power
- 2,5” / 1,75” voice coil (LF/HF)
- High sensitivity: 96,5 / 104 dB (1W / 1m) (LF/HF)
- FEA optimized common magnet circuit
- Shorting cap for extended response
- Weatherproof cone with treatment for both sides of the cone
- PM4 HF diaphragm
- 70º conical coverage horn





TECHNICAL SPECIFICATIONS

Nominal diameter	250 mm	10 in
Rated impedance (LF/HF)		8 / 16 Ω
Minimum impedance (LF/HF)		5,7 / 10,1 Ω
Power capacity [1] (LF/HF)		300 / 50 W_{AES}
Program power [2] (LF/HF)		600 / 100 W
Sensitivity (LF/HF [3])	96,5 dB	1W / 1m @ Z_N
	104 dB	1W / 1m @ Z_N
Frequency range		50 - 20.000 Hz
Recom. HF crossover		2 kHz or higher (12 dB/oct min slope)
Voice coil diameter (LF/HF)	63,5 mm	2,5 in
	44,4 mm	1,75 in
Bl factor		11,6 N/A
Moving mass		0,035 kg
Voice coil length		17,5 mm
Air gap height		10 mm
X_{damage} (peak to peak)		30 mm

THIELE-SMALL PARAMETERS [4]

Resonant frequency, f_s	48 Hz
D.C. Voice coil resistance, R_e	5,2 Ω
Mechanical Quality Factor, Q_{ms}	5,3
Electrical Quality Factor, Q_{es}	0,41
Total Quality Factor, Q_{ts}	0,38
Equivalent Air Volume to C_{ms}, V_{as}	63 l
Mechanical Compliance, C_{ms}	307 μm / N
Mechanical Resistance, R_{ms}	2 kg / s
Efficiency, η_0	1,7 %
Effective Surface Area, S_d	0,038 m^2
Maximum Displacement, X_{max} [5]	6,7 mm
Displacement Volume, V_d	256 cm^3
Voice Coil Inductance, L_e	0,4 mH

Notes:

[1] The power capaticty is determined according to AES2-1984 (r2003) standard.

[2] Program power is defined as power capacity + 3 dB.

[3] Sensitivity was measured at 1m distance, on axis, with 1W input, averaged in the range 1 - 8 kHz

[4] T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

[5] The X_{max} is calculated as $(L_{vc} - H_{ag})/2 + (H_{ag}/3,5)$, where L_{vc} is the voice coil length and H_{ag} is the air gap height.

Acústica Beyma SL - P.I. Moncada II, C/ Pont Sec, 1C - 46113 Moncada, Valencia (Spain) - Tel. +34 96 130 13 75 - beyma@beyma.com


beyma

PROFESSIONAL LOUDSPEAKERS

www.beyma.com


10CX300Fe

COAXIAL TRANSDUCER

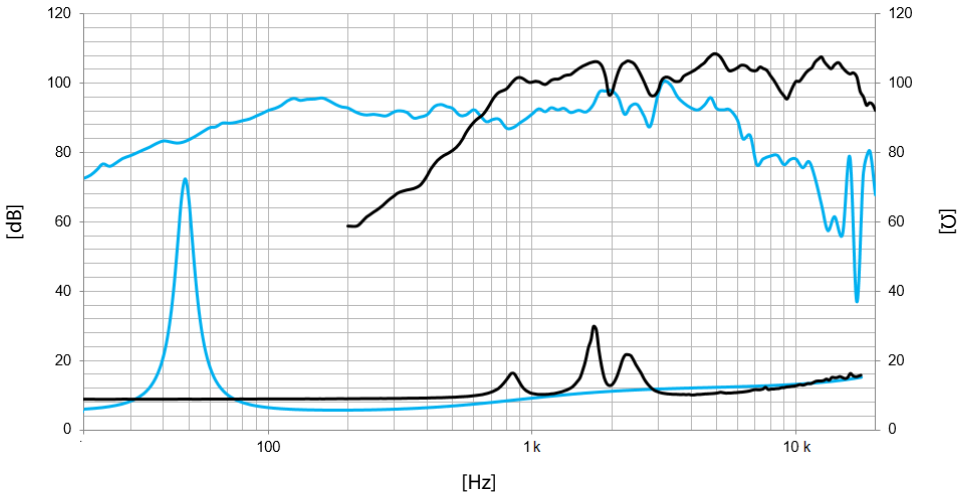


Note: Frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

FILTERED FREQUENCY RESPONSE

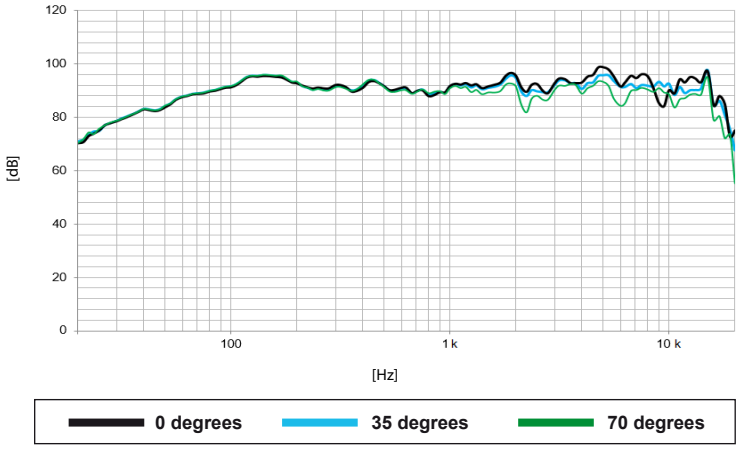

Note: Filtered frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m using filter FD-2CX


POLAR PATTERN

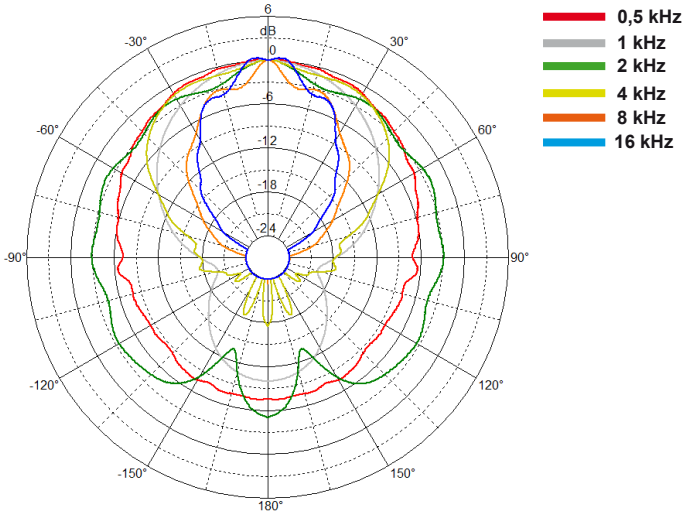

MOUNTING INFORMATION

Overall diameter	260,5 mm	10,3 in
Bolt circle diameter	243,5 mm	9,6 in
Baffle cutout diameter:		
- Front mount	228 mm	9,0 in
Depth	145 mm	5,7 in
Net weight	5,1 kg	11,2 lb
Shipping weight	5,5 kg	12,1 lb

DIMENSION DRAWING

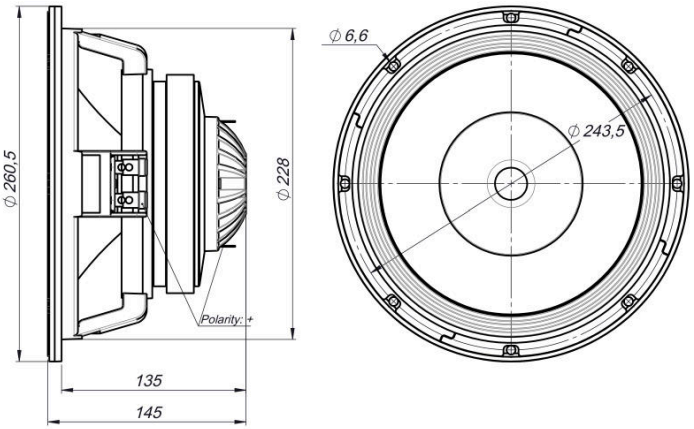

Acústica Beyma SL - P.I. Moncada II, C/ Pont Sec, 1C - 46113 Moncada, Valencia (Spain) - Tel. +34 96 130 13 75 - beyma@beyma.com

07/22