beyma

PROFESSIONAL LOUDSPEAKERS

www.beyma.com

# 18WRS600

## LOW FREQUENCY TRANSDUCER

## KEY FEATURES

maltcross TECHNOLOGY

- Low distortion 18” subwoofer
- Power handling 1.200 W program power
- Exclusive Malt Cross® Technology Cooling System
- High sensitivity: 97 dB (1W / 1m)
- FEA optimized ferrite magnetic circuit
- Ultra low air noise
- Optimized linear behaviour
- Weather resistant cone with treatment on both sides
- 3” copper voice coil
- Optimized pressed steel frame
- Extended controlled displacement: $X_{max}$ ± 8,5 mm
- 53 mm peak-to-peak excursion before damage
- Optimized for direct radiation subwoofer applications





## TECHNICAL SPECIFICATIONS

| | | |
|---|---|---|
| **Nominal diameter** | 460 mm | 18 in |
| **Rated impedance** | | 8 Ω |
| **Minimum impedance** | | 6,5 Ω |
| **Power capacity** [1] | | 600 $W_{AES}$ |
| **Program power** [2] | | 1.200 W |
| **Sensitivity** | 97 dB | 1W / 1m @ $Z_N$ |
| **Frequency range** | | 35 - 1.000 Hz |
| **Voice coil diameter** | 76,2 mm | 3 in |
| **Bl factor** | | 19 N/A |
| **Moving mass** | | 0,178 kg |
| **Voice coil length** | | 21,5 mm |
| **Air gap height** | | 9,5 mm |
| **$X_{damage}$ (peak to peak)** | | 53 mm |

## THIELE-SMALL PARAMETERS [3]

| | |
|---|---|
| **Resonant frequency, $f_s$** | 30 Hz |
| **D.C. Voice coil resistance, $R_e$** | 5,2 Ω |
| **Mechanical Quality Factor, $Q_{ms}$** | 13,8 |
| **Electrical Quality Factor, $Q_{es}$** | 0,48 |
| **Total Quality Factor, $Q_{ts}$** | 0,47 |
| **Equivalent Air Volume to $C_{ms}$, $V_{as}$** | 354 l |
| **Mechanical Compliance, $C_{ms}$** | 159 μm / N |
| **Mechanical Resistance, $R_{ms}$** | 2,4 kg / s |
| **Efficiency, $\eta_0$** | 1,9 % |
| **Effective Surface Area, $S_d$** | 0,1255 $m^2$ |
| **Maximum Displacement, $X_{max}$** [4] | 8,5 mm |
| **Displacement Volume, $V_d$** | 1130 $cm^3$ |
| **Voice Coil Inductance, $L_e$ @ 1 kHz** | 1,3 mH |

**Notes**:

[1] The power capaticty is determined according to AES2-1984 (r2003) standard.

[2] Program power is defined as power capacity + 3 dB.

[3] T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

[4] The $X_{max}$ is calculated as $(L_{vc} - H_{ag})/2 + (H_{ag}/3,5)$, where $L_{vc}$ is the voice coil length and $H_{ag}$ is the air gap height.


beyma

PROFESSIONAL LOUDSPEAKERS

www.beyma.com

# 18WRS600

## LOW FREQUENCY TRANSDUCER

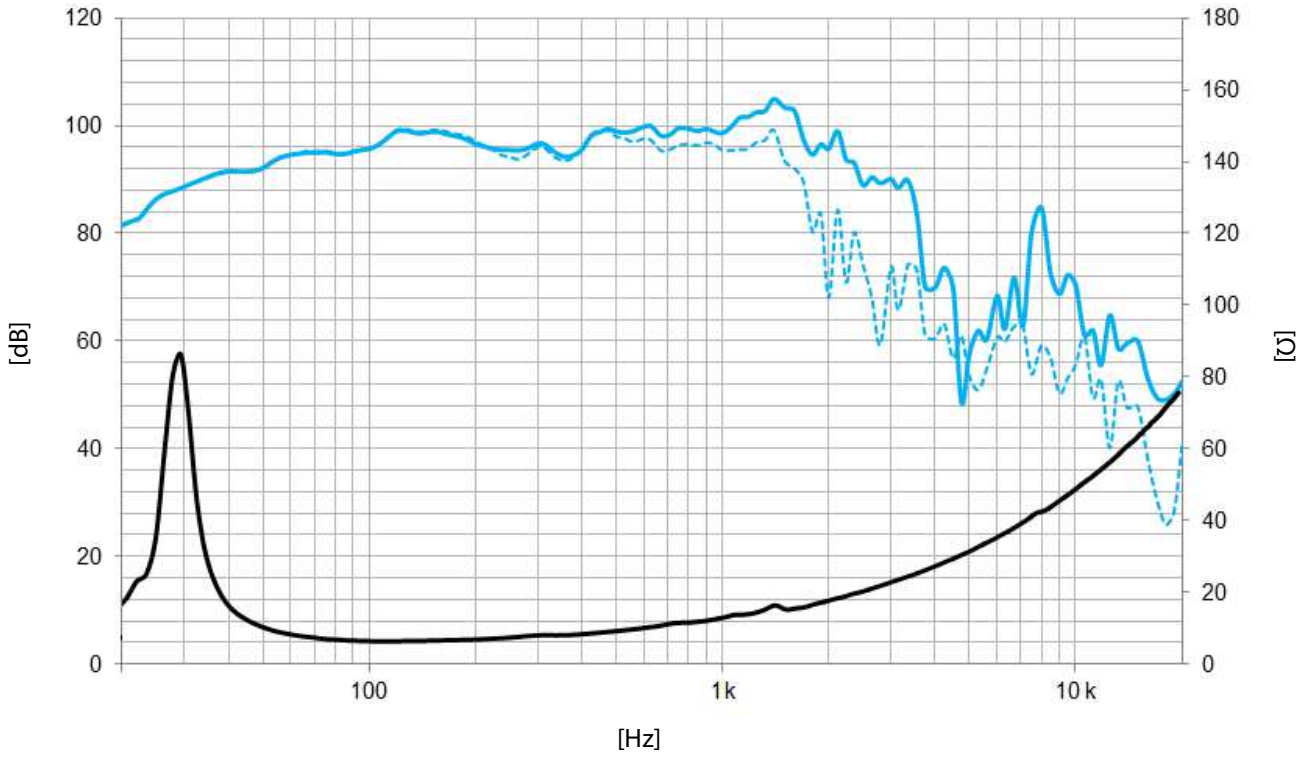


**Note:** Frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

**Frequency response on axis**
**Frequency response 45º off axis**

## MOUNTING INFORMATION

| | | |
|---|---|---|
| **Overall diameter** | 457 mm | 17,99 in |
| **Bolt circle diameter** | 437,5 mm | 17,22 in |
| **Baffle cutout diameter:** | | |
| **- Front mount** | 425 mm | 16,73 in |
| **Depth** | 218 mm | 8,58 in |
| **Net weight** | 8,7 kg | 19,2 lb |
| **Shipping weight** | 10 kg | 22 lb |

## DIMENSION DRAWING

