beyma

PROFESSIONAL LOUDSPEAKERS
www.beyma.com

CD-101Nd/PK

COMPRESSION DRIVER

Preliminary Data Sheet

KEY FEATURES

- Next generation high performance 1” (25,4 mm) exit compression driver
- Deplocex® Patent Pending Technology for improved thermal disipation, low power compression losses and high power handling
- 1,1” (28 mm) Copper Clad Aluminum voice coil
- 80 W program power above 2 kHz
- Sensitivity: 110 dB (1W / 1m)
- VPEQ® Patent Pending Technology for linear frequency response
- Exclusive High Temperature Polymer annular ring design optimized with F.E.M for linear and extended response with minimized resonances
- Copper shorting cap for reduced distortion, linear inductance and increased output
- F.E.M. optimized high grade neodymium magnetic circuit





TECHNICAL SPECIFICATIONS

Throat diameter	25,4 mm	1 in
Rated impedance		8 Ω
Minimum impedance		7,2 Ω
D.C. resistance		6 Ω
Power capacity [1]		40 W_{AES} above 2 kHz
Program power [2]		80 W above 2 kHz
Sensitivity [3]		110 dB 1W / 1m @ Z_N coupled to TD-164

Frequency range		2 - 20 kHz
Recommended crossover		2 kHz or higher (12 dB/oct min.)
Voice coil diameter	28 mm	1,1 in
Flux density		1,8 T
Bl factor		3 N/A

Notes:

[1] The power capaticty is determined according to AES2-1984 (r2003) standard.

[2] Program power is defined as the transducer’s ability to handle normal music program material.

[3] Sensitivity was measured at 1m distance, on axis, with 1W input, averaged in the range 2 - 7 kHz

beyma


PROFESSIONAL LOUDSPEAKERS

www.beyma.com

CD-101Nd/PK

COMPRESSION DRIVER

Preliminary Data Sheet

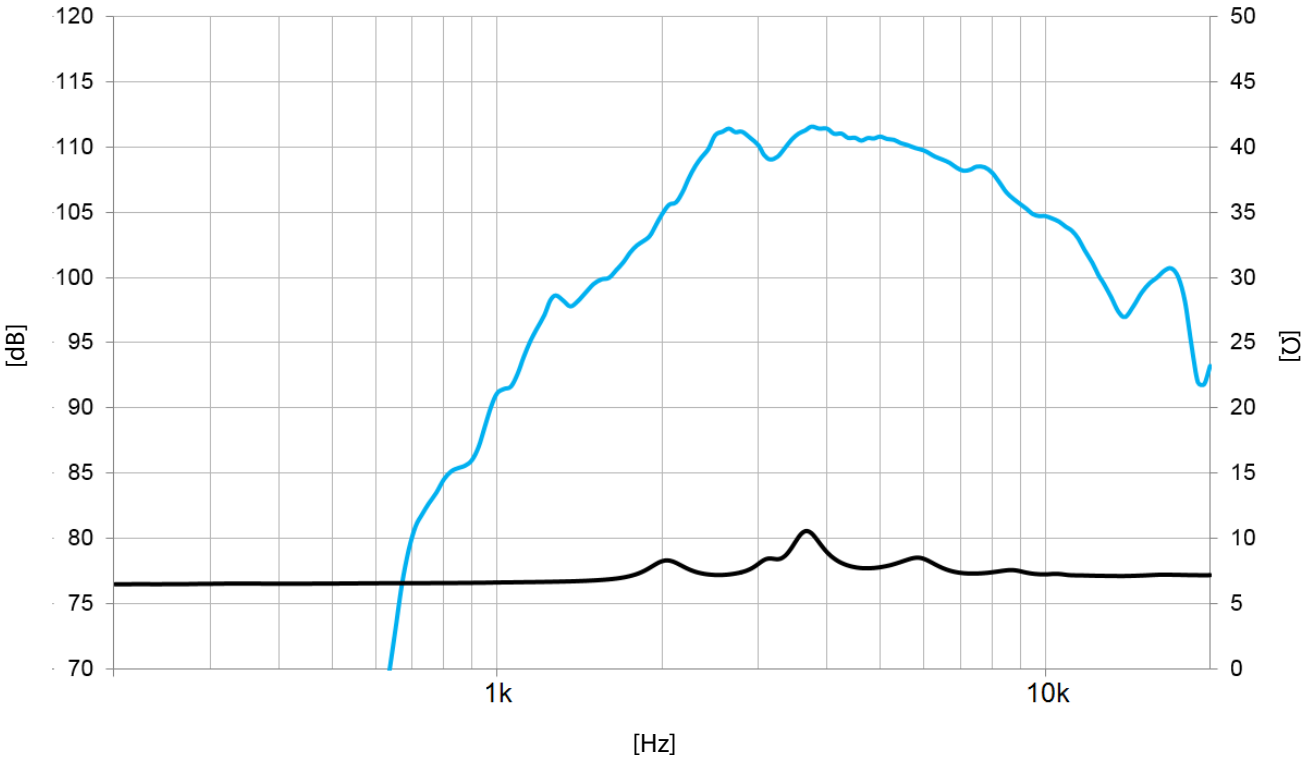

Note: On axis frequency response measured coupled to TD-164 horn in anechoic chamber, 1W / 1m

MOUNTING INFORMATION

Overall diameter	90,4 mm	3,55 in
Depth	44 mm	1,7 in
Mounting	Three M5 threaded holes, 120º apart	
	on 57 mm (2,24 in) diameter circle	
	Two M5 threaded holes, 180º apart	
	on 76,2 mm (3 in) diameter circle	
Net weight	0,3 kg	0,7 lb
Shipping weight	0,6 kg	1,3 lb

DIMENSION DRAWING

