beyma

PROFESSIONAL LOUDSPEAKERS
www.beyma.com


CP-750Ti

COMPRESSION DRIVER

KEY FEATURES

- 2” exit (50 mm) high frequency compression driver
- 2,8” (72,2 mm) voice coil diameter
- 140 W program power above 0,8 kHz
- Sensitivity: 110 dB, 1W / 1m
- Shorting copper cap for extended response
- Titanium dome with polyester surround
- Lightweight aluminium voice coil
- Ferrite magnet



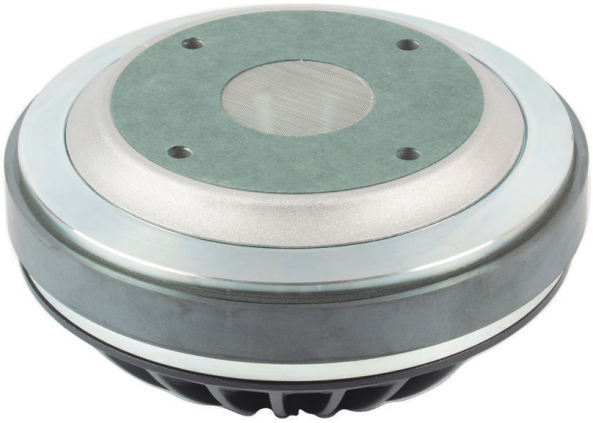

TECHNICAL SPECIFICATIONS

Nominal diameter	50,8 mm	2 in
Rated impedance		8 Ω
Minimum impedance		7,7 Ω
D.C. resistance		5,5 Ω
Power capacity [1]	70 W_{AES} above 0,8 kHz	
	90 W_{AES} above 1,5 kHz	
Program power [2]	140 W above 0,8 kHz	
	180 W above 1,5 kHz	
Sensitivity [3]	110 dB 1W / 1m @ Z_N	
	coupled to TD-460N	

Frequency range	0,6 - 20 kHz	
Recommended crossover	0,8 kHz or higher	
	(12 dB/oct min.)	
Voice coil diameter	72,2 mm	2,8 in
Magnetic assembly weight	6,5 kg	14,3 lb
Flux density		1,9 T
BI factor		10 N/A

Notes:

[1] The power capaticty is determined according to AES2-1984 (r2003) standard.

[2] Program power is defined as the transducer’s ability to handle normal music program material.

[3] Sensitivity was measured at 1m distance, on axis, with 1W input, averaged in the range 1 - 7 kHz


beyma

PROFESSIONAL LOUDSPEAKERS

www.beyma.com

CP-750Ti

COMPRESSION DRIVER

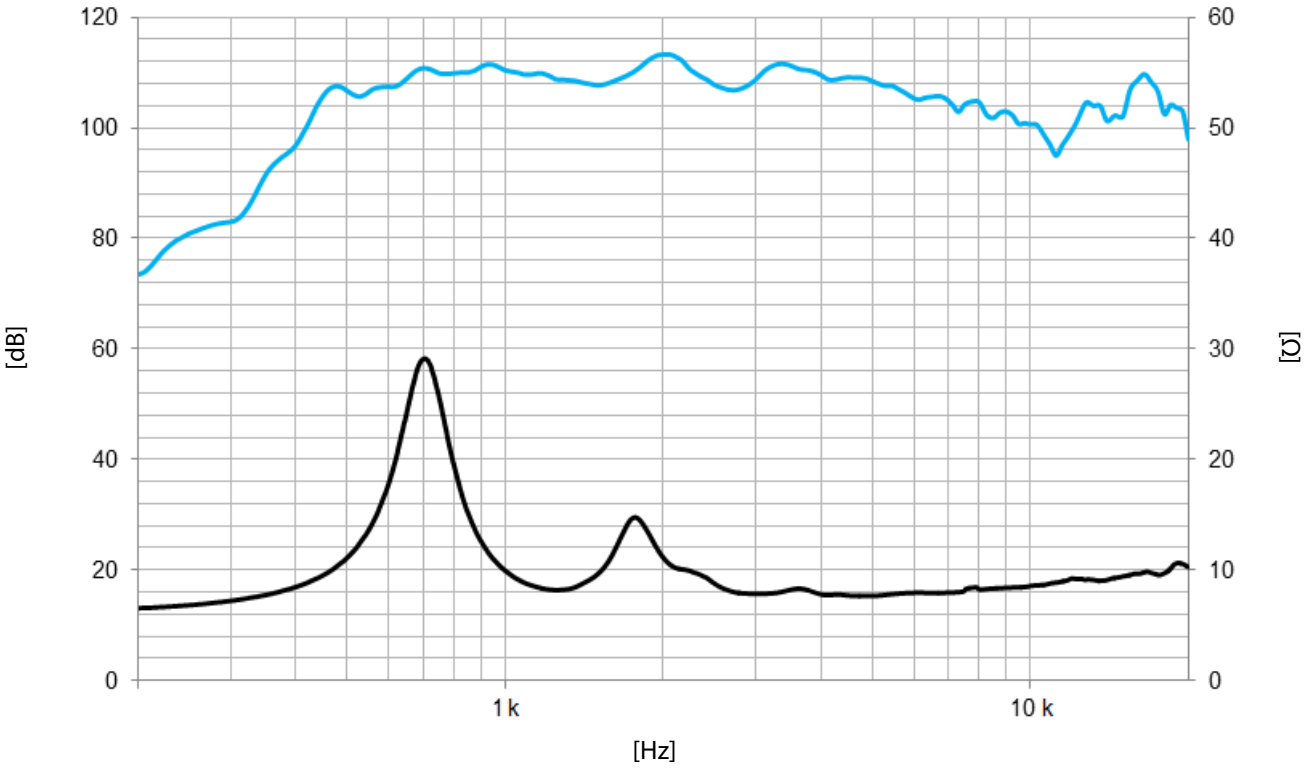

Note: On axis frequency response measured coupled to TD-460N horn in anechoic chamber, 1W / 1m

MOUNTING INFORMATION

Overall diameter	192 mm	7,6 in
Depth	88 mm	3,4 in
Mounting	Four M6 threaded holes, 90º apart on 101,6 mm (4 in) diameter circle	
Net weight	7,0 kg	15,5 lb
Shipping weight	7,3 kg	16,0 lb

DIMENSION DRAWING

