EMINENCE®

AMERICAN STANDARD SERIES

# DELTA-12A

Recommended for professional audio as a mid-bass or woofer (with high-pass filter) in vented enclosures.



## SPECIFICATION

| | |
|---|---|
| Nominal Basket Diameter | 12.0", 305 mm |
| Nominal Impedance* | 8 Ω |
| Power Rating** | |
| Watts | 400 W |
| Music Program | 800 W |
| Resonance | 55 Hz |
| Usable Frequency Range | 54 Hz – 5.0 kHz |
| Sensitivity*** | 98.3 dB |
| Magnet Weight | 56 oz. |
| Gap Height | .375", 9.5 mm |
| Voice Coil Diameter | 2.5", 64 mm |

## THIELE & SMALL PARAMETERS*

| | |
|---|---|
| Fs | 55 Hz |
| Re | 6.30 Ω |
| Le | 0.74 mH |
| Qms | 5.27 |
| Qes | 0.46 |
| Qts | 0.43 |
| Vas | 2.87 cu.ft., 81.30 liters |
| Vd | 125.0 cc |
| Cms | 0.21 mm/N |
| BL | 13.50 T-M |
| Mms | 39 grams |
| EBP | 120 |
| Xmax | 2.40 mm |
| Sd | 519.5 cm2 |
| Xlim | 9.9 mm |

## MOUNTING INFORMATION


| | |
|---|---|
| Recommended Enclosure Volume | |
| Sealed | N/A |
| Vented | 25.50–85.00 liters, 0.90–3.00 cu.ft. |
| Driver Volume Displaced | 0.079 cu.ft., 2.25 liters |
| Overall Diameter | 12.03", 305.6 mm |
| Baffle Hole Diameter | 11.07", 281.2 mm |
| Front Sealing Gasket | Yes |
| Rear Sealing Gasket | Yes |
| Mounting Holes Diameter | 0.25", 6.4 mm |
| Mounting Holes B.C.D. | 11.59", 294.4 mm |
| Depth | 5.35", 135.9 mm |
| Net Weight | 11.40 lbs , 5.17 kg |
| Shipping Weight | 13.50 lbs , 6.12 kg |

## MATERIALS OF CONSTRUCTION

- Aluminum voice coil
- Polyimide former
- Ferrite magnet
- Vented core
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Solid composition felt dust cap



## FREQUENCY RESPONSE & IMPEDANCE CURVE*

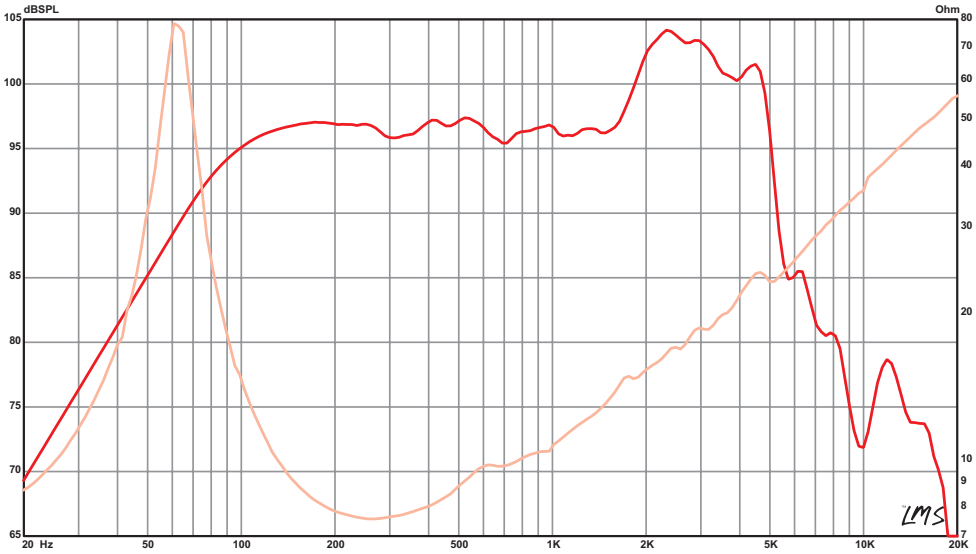


LEARN MORE AT EMINENCE.COM

EMINENCE®

The Art and Science of Sound

*From design and manufacturing to the stage or studio. Once you've experienced the performance of Eminence, you'll never accept anything else.*

## MISSION STATEMENT

*Eminence is dedicated to providing the best Quality, Value and Service to meet our customers' needs.*

## FOOTNOTES

* Please consult www.eminence.com for specifications of models with alternative impedances.

** Multiple units exceed published ratings evaluated under EIA 426A specification while tested in a free-air, non-temperature-controlled environment.

*** The average output across the usable frequency range when applying 1W/1m into the nominal impedance. i.e: 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. x 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Carver PM-120 amplifier | 2700 cu. ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).

**** BETA 8CX, 10CX, and 12CX are coaxial speakers with tweeter sold separately. Published usable frequency response contingent upon use of ASD:1001 HF Driver.

***** Multiple units exceeded published ratings evaluated under EIA-426A or AES specification while mounted on Eminence's H290, H290S, or H2EA horn in a non-temperature-controlled environment.

******The average on axis output across the entire usable frequency range when applying 1W/1m into the nominal impedance, i.e. 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft x 2ft baffle is built into the wall with horn front mounted | Carver PM-120 amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).

Prices, specifications and product cosmetics are subject to change without notice.

**EMINENCE SPEAKER LLC**

838 Mulberry Pike, Eminence, KY 40019

DESIGNED AND ASSEMBLED IN THE USA

*Follow us:*

EMINENCE.COM YouTube