PROFESSIONAL LOUDSPEAKERS

15FH520

15" - 600 W - 97 dB - 16 Ohm



NOMINAL SPECIFICATIONS

Nominal Diameter	380 mm (15 in)
Overall Diameter	393 mm (15.47 in)
Bolt Circle Diameter	374 mm (14.72 in)
Baffle Cutout Diameter	356 mm (14.02 in)
Depth	181.3 mm (7.14 in)
Flange and Gasket Thickness	13.7 mm (0.54 in)
Net Weight	**4.6 kg (10.1 lb)**
Shipping Box (Single Carton Box)	430 x 427 x 236 mm (16.9 x 16.8 x 9.3 in)
Shipping Weight	5.7 kg (12.6 lb)

PART NUMBER

Push Terminals - 16 Ohm Version	03804126
Recone Kit - 16 Ohm Version	R3804126

TECHNICAL PARAMETERS

Nominal Impedance	16 Ohm
Minimum Impedance	14.4 Ohm
AES Power Handling **(1)**	600 W
Maximum Power Handling (2)	**1200 W**
Sensitivity (1W/1m)	**97 dB**
Frequency Range	40÷4000 Hz
Voice Coil Diameter	**77 mm (3 in)**
Winding Material	Al
Former Material	Glass Fiber
Winding Depth	22 mm (0.87 in)
Magnetic Gap Depth	**12 mm (0.47 in)**
Flux Density	1.1 T
Magnet	Neodymium Slug
Basket Material	Aluminum
Demodulation	Aluminum Ring
Cone Surround **(3)**	Triple Roll
NET Air Volume filled by Loudspeaker	3.4 dm^3 (0.120 ft^3)
Spider Profile	1x variable height waves

THIELE & SMALL PARAMETERS

Fs	42 Hz
Re	12.7 Ohm
Qes	0.65
Qms	13.5
Qts	0.62
Vas	134.2 dm^3 (4.74 ft^3)
Sd	847 cm^2 (131.29 in^2)
Xmax **(4)**	9.00 mm
Xdamage **(5)**	16 mm
Mms	107.2 g
Bl	23.5 N/A
Le	1.7 mH
Mmd	79.3 g
Cms	0.13 mm/N
Rms	2.1 kg/s
Eta Zero	1.48 %
EBP	65 Hz

NOTES:


(1) 2 Hours Test According to AES 2-1984 Rev. 2003


(2) Maximum power is defined as 3dB greater than nominal power.


(3) Treated Polycotton

(4) Xmax= [(winding depth - magnetic gap depth)/2] + (magnetic gap depth/3)

(5) Maximum excursion before permanent damage

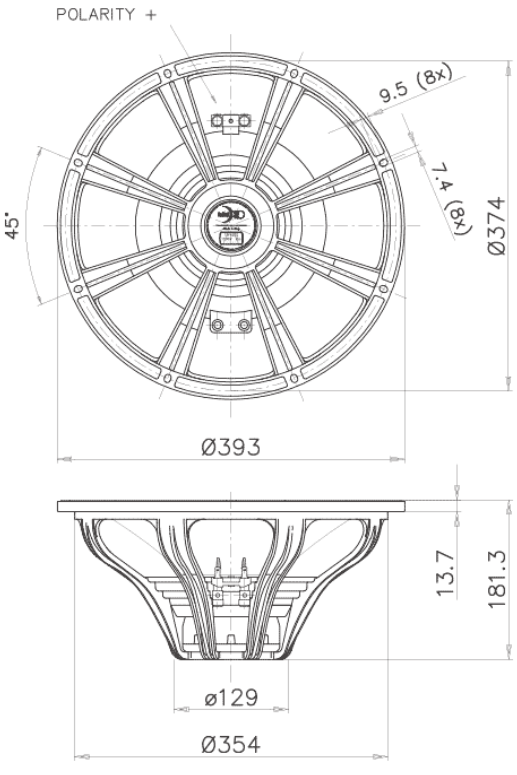

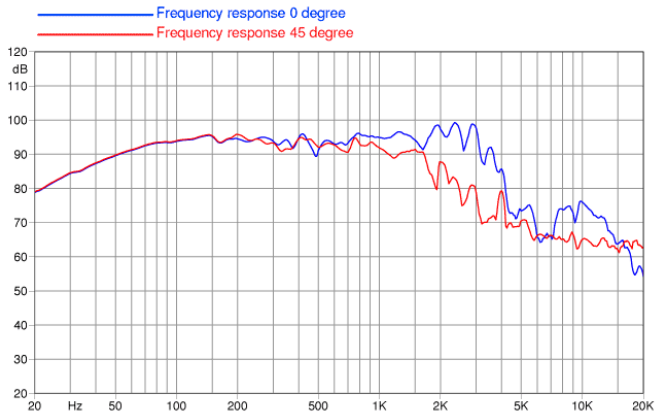

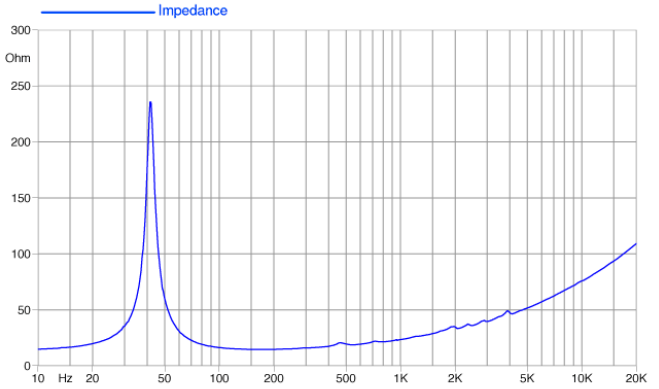

©Copyright 2026 **Faital S.p.A.** • All rights reserved.