PROFESSIONAL LOUDSPEAKERS

18FH510

18" - 600 W - 98 dB - 8 Ohm



NOMINAL SPECIFICATIONS

Nominal Diameter	460 mm (18 in)
Overall Diameter	460 mm (18.11 in)
Bolt Circle Diameter	440 mm (17.32 in)
Baffle Cutout Diameter	421 mm (16.57 in)
Depth	201.5 mm (7.93 in)
Flange and Gasket Thickness	13.7 mm (0.54 in)
Net Weight	**8.8 kg (19.3 lb)**
Shipping Box (Single Carton Box)	503 x 500 x 258 mm (19.8 x 19.7 x 10.2 in)
Shipping Weight	10.3 kg (22.7 lb)

PART NUMBER

Push Terminals - 8 Ohm Version	04604080
Recone Kit - 8 Ohm Version	R4604080

TECHNICAL PARAMETERS


Nominal Impedance	8 Ohm
Minimum Impedance	6.5 Ohm
AES Power Handling **(1)**	600 W
Maximum Power Handling (2)	**1200 W**
Sensitivity (1W/1m)	**98 dB**
Frequency Range	30÷2500 Hz
Voice Coil Diameter	**77 mm (3 in)**
Winding Material	Cu
Former Material	Glass Fiber
Winding Depth	22 mm (0.87 in)
Magnetic Gap Depth	**10.5 mm (0.41 in)**
Flux Density	1.2 T
Magnet	Ferrite Ring
Basket Material	Aluminum
Demodulation	No
Cone Surround **(3)**	Triple Roll
NET Air Volume filled by Loudspeaker	6.1 dm^3 (0.215 ft^3)
Spider Profile	1x variable height waves


THIELE & SMALL PARAMETERS


Fs	30 Hz
Re	5.1 Ohm
Qes	0.30
Qms	13.6
Qts	0.29
Vas	411.9 dm^3 (14.55 ft^3)
Sd	1207 cm^2 (187.09 in^2)
Xmax **(4)**	9.25 mm
Xdamage **(5)**	21 mm
Mms	139.0 g
Bl	21 N/A
Le	1.06 mH
Mmd	91.6 g
Cms	0.20 mm/N
Rms	1.9 kg/s
Eta Zero	3.56 %
EBP	100 Hz


NOTES:

(1) 2 Hours Test According to AES 2-1984 Rev. 2003
(2) Maximum power is defined as 3dB greater than nominal power.
(3) Treated Polycotton
(4) Xmax= [(winding depth - magnetic gap depth)/2] + (magnetic gap depth/3)
(5) Maximum excursion before permanent damage

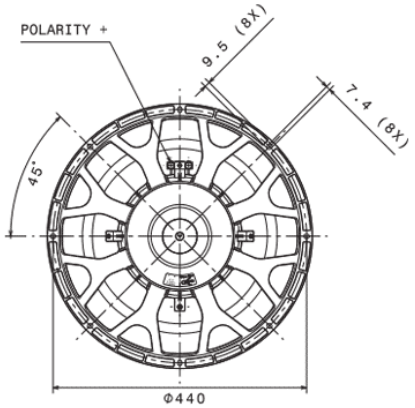

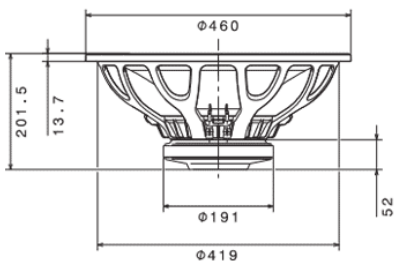

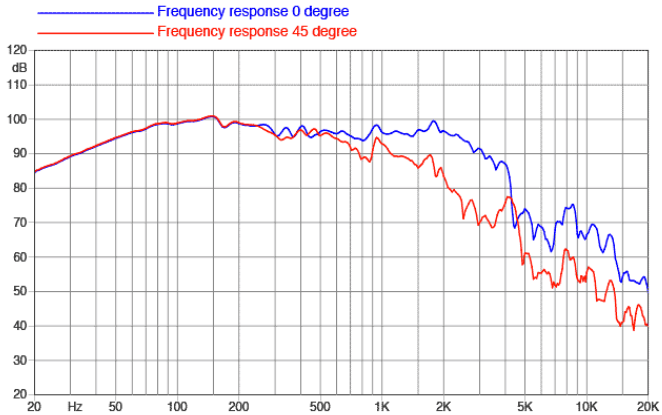

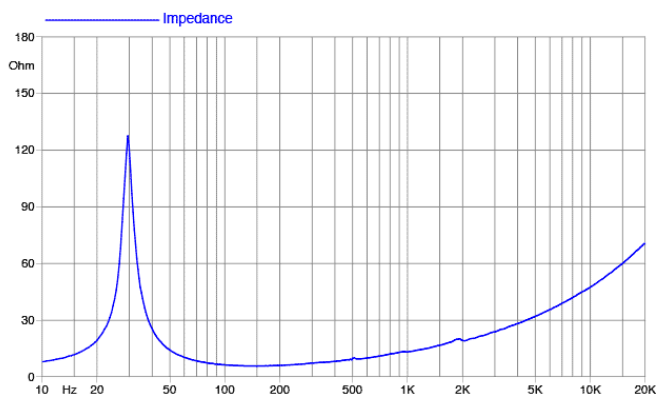

©Copyright 2026 **Faital S.p.A.** • All rights reserved.