PHT-410


High Frequency Horn-Drivers



Features


- Small speaker horn driver
- 80 watts peak power handling
- Phenolic resin 1.0” diaphragm diameter
- Ferrite magnetics






GENERAL SPECIFICATIONS


Diaphragm diameter	25.4 mm / 1 in
Power handling	20 W
Impedance	8 Ohm
Sensitivity (1w/1m)	105 dB
Frequency range	2000 - 16000 Hz
Cutoff frequency	2000 Hz
Nominal coverage angle (HxV) -6dB	80°
Material	Injection polymer A.B.S
Magnet type	Ferrite
Diaphragm material	Phenolic Resin
Baffle cutout dimension	90 mm
	3.54 in




TOP VIEW



BOTTOM VIEW



FRONT VIEW




SIDE VIEW

SHIPPING INFORMATION

Unit weight	0.88 kg / 1.94 lb
Shipping Weight	0.99 kg / 2.18 lb
Packaging dimension	132x119x130 mm
WxDxH	5.20x4.69x5.12 in

Frequency response and Impedance curve

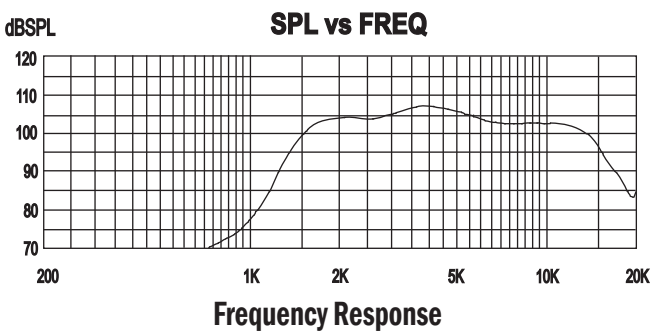

SINCE 1991
STH PROFESSIONAL AUDIO CO.,LTD.
AIA Sathorn Tower, unit 1607-1608, 16th floor, No.11/1, South Sathorn Road, Yannawa, Sathorn, Bangkok 10120