
ME102+400 8 Ω

- Line Array optimized Waveguide with DE400 HF driver and ME102 horn
- 140° max horizontal coverage
- 100 W continuous program power capacity
- 44 mm (1.7 in) aluminium voice coil
- Polyimide diaphragm
- 1200 - 18000 Hz response
- 108.5 dB sensitivity
- Compact Neodymium magnet assembly
- Recommended hardware for horn mounting: two M6x10 screws

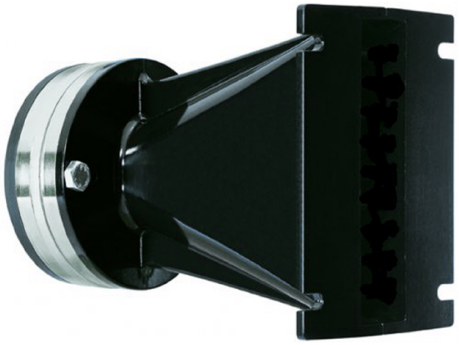

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

ME102+400 8 Ω

SPECIFICATIONS HORN UNIT

Waveguide mounted on 90°x10° bell horn

Nominal Impedance	**8 Ω**
Active Radiating Factor	**92.5 %**
Horizontal Coverage	**140 ° Max**

SPECIFICATIONS HF UNIT

Minimum Impedance	**7.7 Ω**
Nominal Power Handling 2 hour test made with continuous pink noise signal (6 dB crest factor) within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	**50 W**
Continuous Power Handling Power on Continuous Program is defined as 3 dB greater then the Nominal rating.	**100 W**
Sensitivity Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	**108.5 dB**
Frequency Range	**1.2 kHz - 18 kHz**
Recommended Crossover 12 dB/oct. Or higher slope high-pass filter.	**1.5 kHz**
Voice Coil Diameter	**44 mm (1.7 in)**
Winding Material	**Aluminium**
Flux Density	**1.8 T**
Diaphragm Material	**Polyimide**

MOUNTING AND SHIPPING INFO

Recommended hardware for horn mounting: two M6x10 screws


Exit Size	**102x25 mm (4x1 in)**
Net Weight	**1.98 kg (4.35 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**2.13 kg (4.68 lb)**
Shipping Box	**175x115x90 mm (6.89x4.53x3.54 in)**
Driver Diameter	**86 mm (3.3 in)**
Dimensions	**111x87x155 mm (4.4x3.5x6.1 in)**


SERVICE KITS

HF replacement-diaphragm	**MMD4008**

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com


ME102+400 8 Ω

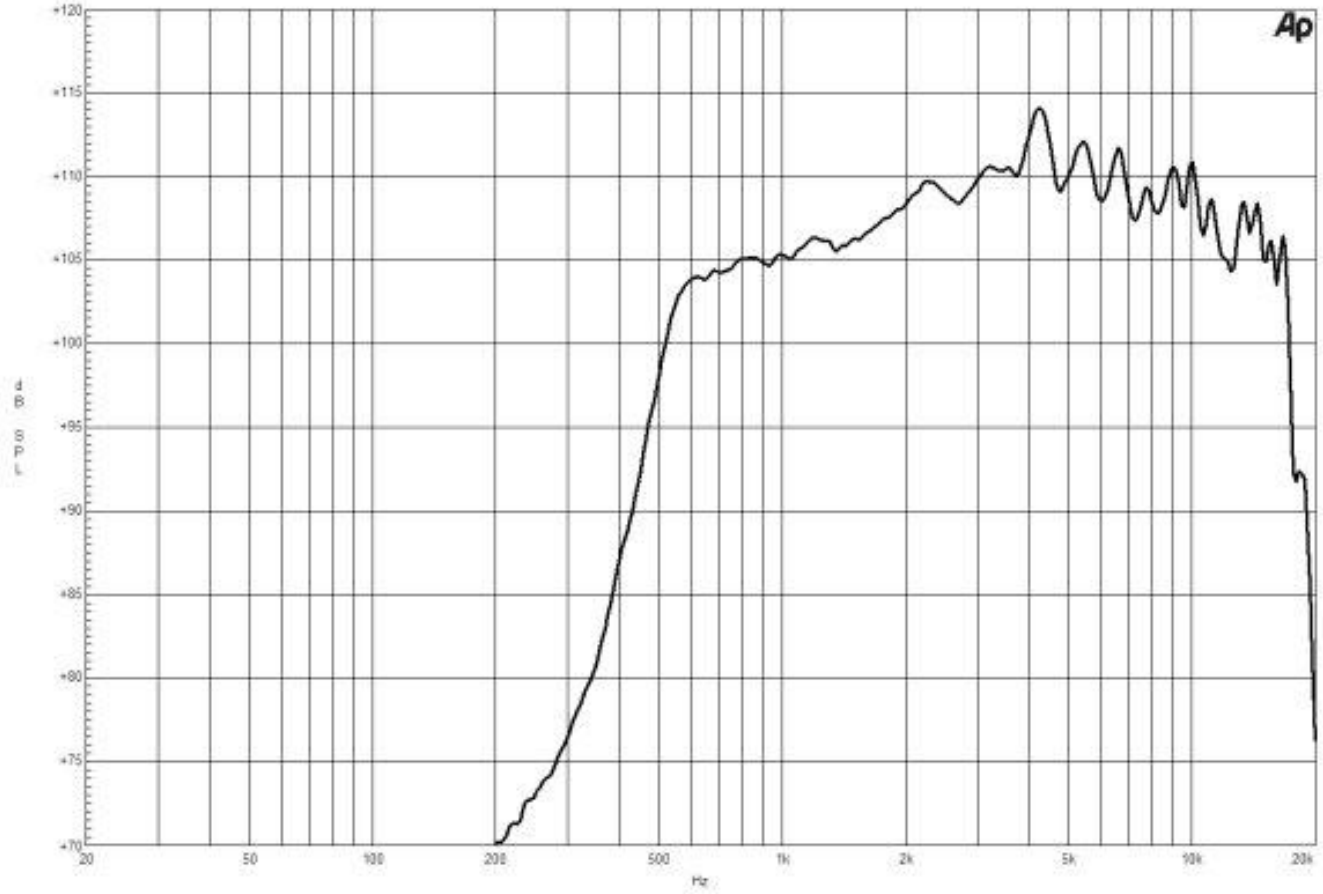


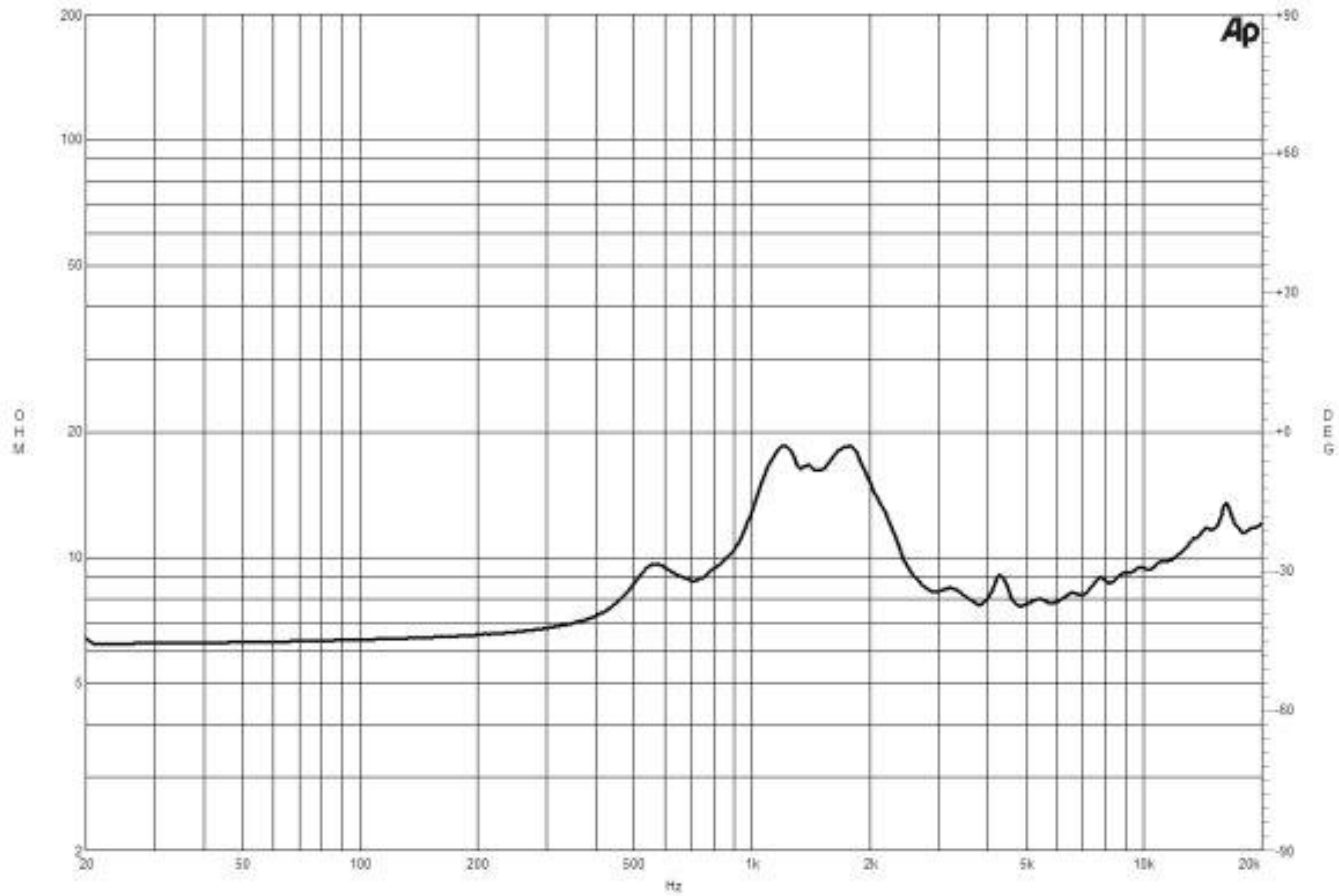

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

ME102+400 8 Ω

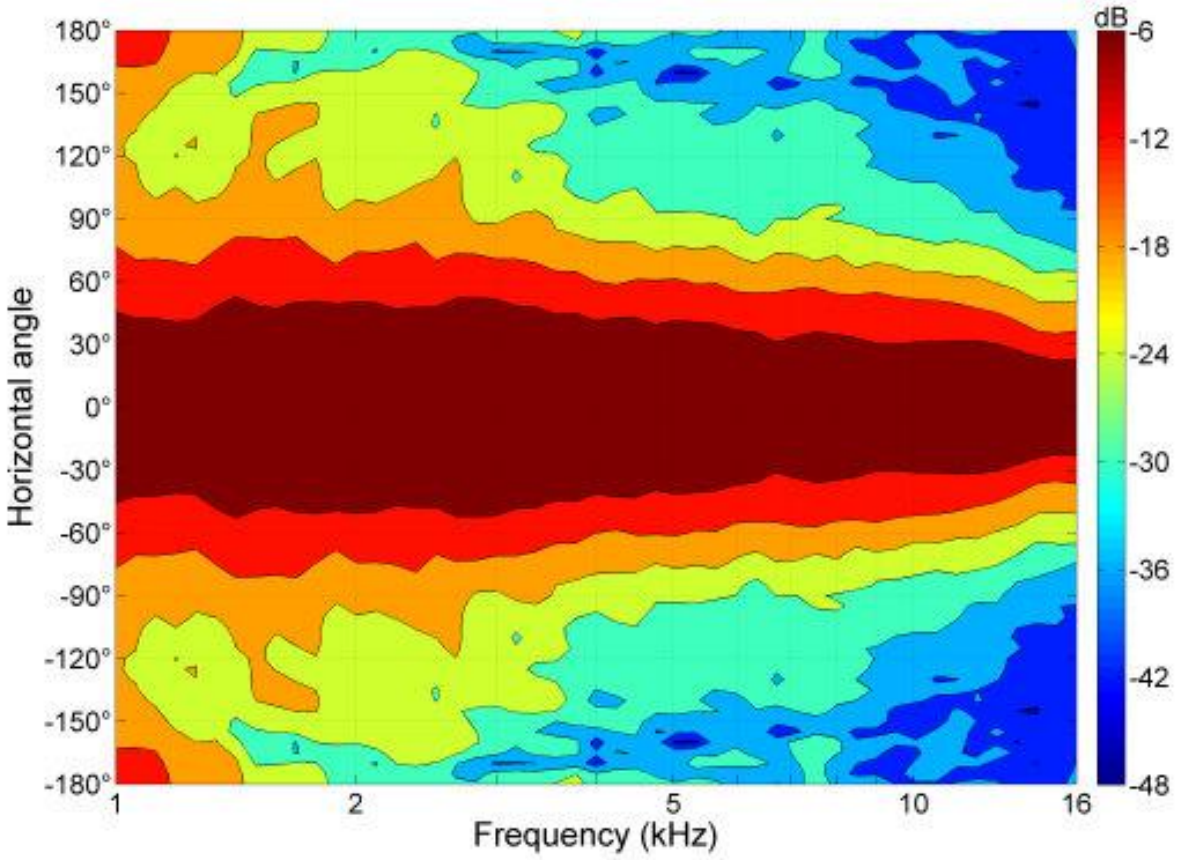

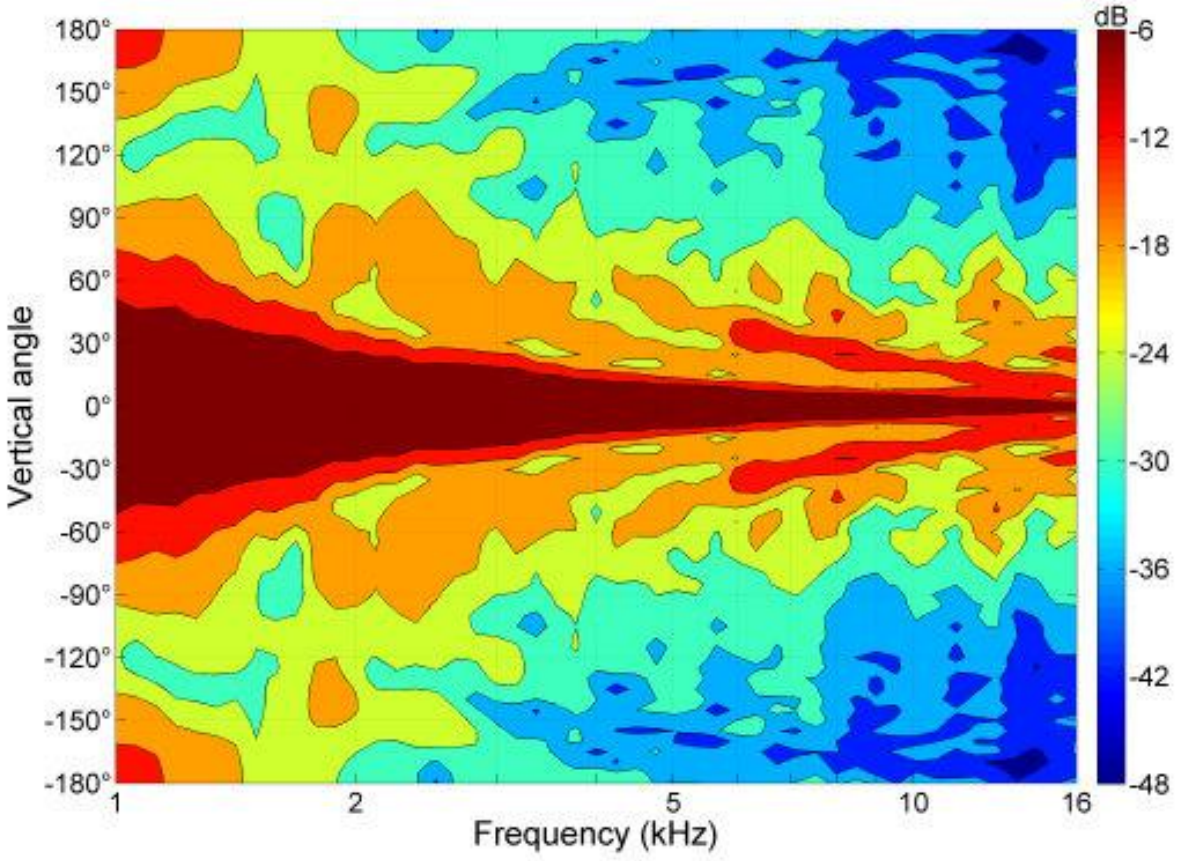

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

ME102+400 8 Ω

